



BOYA

Windshield and Suspension System for Shotgun Microphones

防风毛减震架系统（适用于枪麦）

BY-WS1000


Product Structure

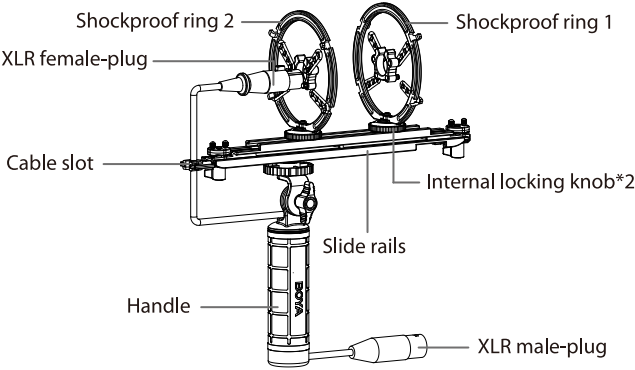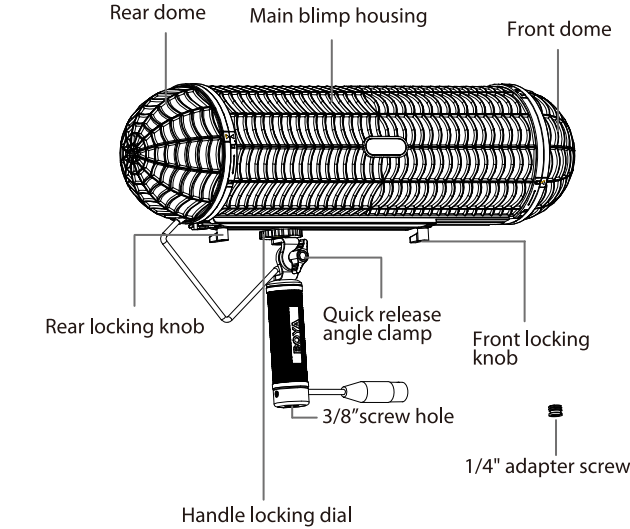


Adjustment

1. Handle angle


- 1) Initial default angle

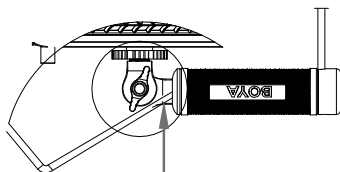


- 2) Loosen the knob and adjust to desired angle



- 3) Tighten the knob after adjustment




2. Handle position

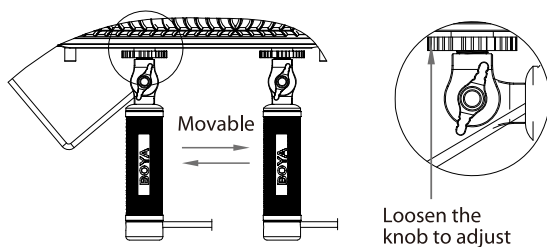


Operations

1. Unscrew and remove the rear dome


Clockwise to tight, counterclockwise to loose

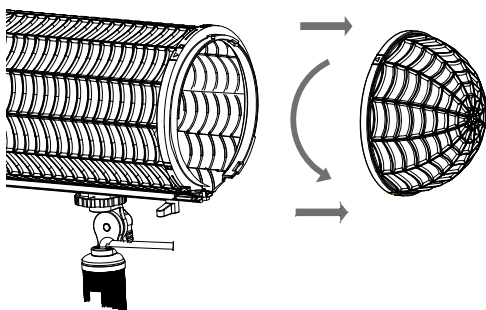



2. Loosen the front and rear knobs



3. Slide the suspension body out of the main blimp housing

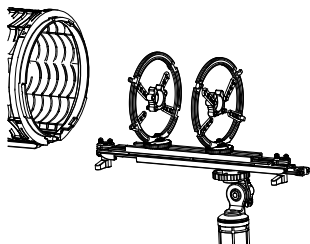


4. Loosen the locking knobs to adjust position of shockproof rings

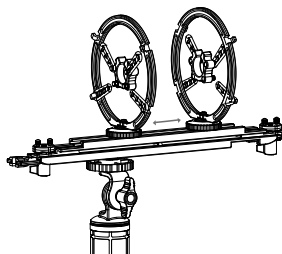


5. Place the microphone

NOTE: Fits up to 320mm in length and $\phi 19$ -22mm shotgun microphone

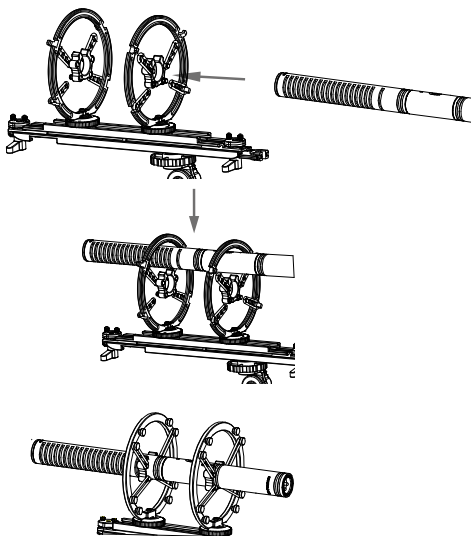


6. Connect the XLR plug

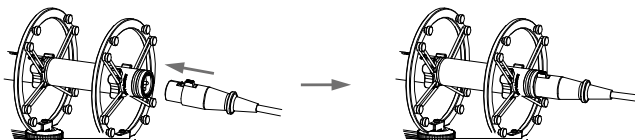


7. Place the suspension body back into the main blimp housing


- 1) Slide in and align the rails with the main blimp housing

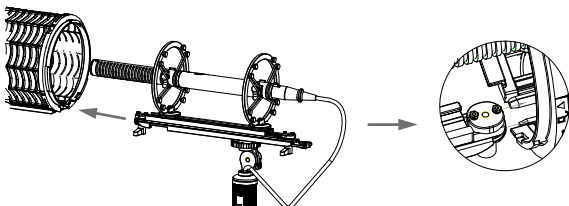


- 2) Tighten the front and rear knobs

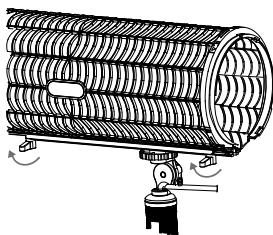

- 3) Place the cable into the slot

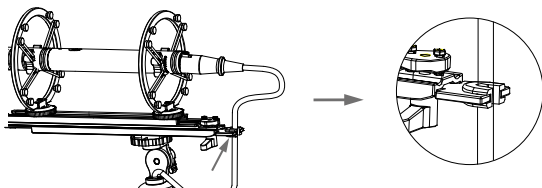


8. Replace and screw the rear dome

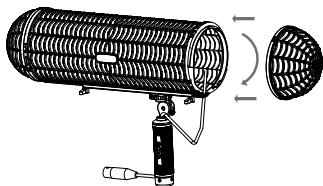


9. Using the fur windshield

- 1) Loosen the drawstring of fur windshield and stretch over the blimp body

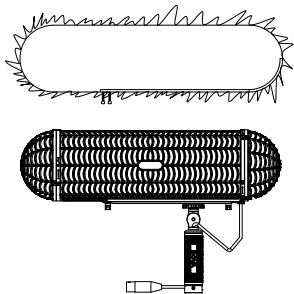


- 2) Straighten the fur windshield, then tighten and lock the drawstring

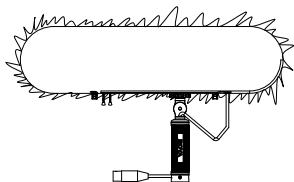

Using indoor

Using indoor without main blimp housing

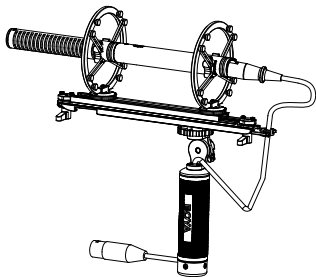

SHENZHEN JIAYZ PHOTO INDUSTRIAL., LTD.

The BOYA logo is a trademark which is registered and owned by Shenzhen Jiayz Photo Industrial., Ltd.

深圳市长丰影像器材有限公司

地址:广东省深圳市龙华区观澜街道大富社区硅谷动力智能终端产业园A16栋

TEL: 400 6131096

Email: sales@boya-mic.com

www.boya-mic.com / www.jiayz.com