

EV2456-WT

Your advantages



Der EIZO FlexScan EV2456 erfüllt höchste Ansprüche an einen modernen Bildschirmarbeitsplatz. Bildqualität und Ergonomie überzeugen gleichermaßen. Mit 1920 x 1200 Bildpunkten, einem IPS-LCD-Modul mit LEDBacklight und reflexionsarmer Oberfläche meistert er eine detailreiche und exzellente Bildwiedergabe. Das erleichtert die Arbeit im Büro. Für die blendfreie, klare Sicht auf das Bild sorgt Auto-EcoView und regelt die Helligkeit passend zur Umgebung. Insgesamt wirkt der UltraSlim-Monitor wegen seiner extrem schmalen Ränder sehr kompakt. Besonders im Mehrschirmbetrieb brilliert der fast rahmenlose Monitor mit überzeugender Übersicht. Die zum Lieferumfang gehörige Software Screen InStyle eröffnet die Möglichkeit, den Schirm vom Windows PC oder aus dem Netzwerk zu steuern. Mehrschirmlösungen lassen sich mit Screen InStyle synchron bedienen.

- ✓ 24.1" LCD monitor with 16:10 aspect ratio and IPS technology for outstanding image quality
- ✓ Bezel only 1 mm on both sides and at the top: extremely compact and elegant design
- ✓ Contrast 1000:1, brightness 350 cd/m², 178° viewing angle
- ✓ Flicker-free image reproduction thanks to hybrid brightness control
- ✓ Auto EcoView, EcoView Index, and EcoView Optimizer for maximum power savings and superb ergonomics
- ✓ Integrated speakers and headphone jack
- ✓ USB 3.0 hub with one upstream and two downstream ports
- ✓ DisplayPort, HDMI, DVI-D, and D-Sub inputs for digital and analogue connection

Features


Ultra-slim. Ultra-smooth!

Whether it's in sophisticated black or pristine, eye-grabbing white: The ultra-thin design with its bezel of only 1 mm and its completely flat and smooth front side is truly impressive. A thin black glass frame with a width of just 5.2 mm is all that separates the display and bezel from one another. Even from the thin side and smart-looking back, the monitor will make passers-by do a double take. The EV2456 model also offers a fully flat front surface with integrated sensor buttons.



Maximum image quality thanks to the IPS panel


The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920 x 1200 pixels, maximum contrast of 1000:1, and stable brightness of up to 350 cd/m². That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

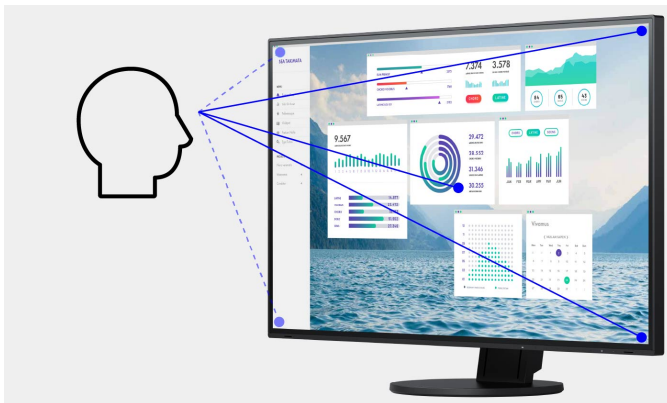


Precise colour control

An image can only be perfect if the colours are, too. This is why EIZO office monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example,

you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values fully automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.

Anti-glare coating: more image, less reflection

The EV2456 offers a surface with optimal anti-glare coating. By minimising glare from the spread of the reflected light, the anti-glare coating effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the screen, without having to sit in a forced position to prevent glare.


Flicker free: for the sake of the eyes

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience. Flickering is reduced down to absolute freedom from flickering, without impairing image quality or colour stability. In addition, the brightness can be set to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

Features

Preset colour modes: Optimised display at the press of a button

Preset colour modes make it easier for you to work and view images, texts and videos. This is because when choosing colour settings, it makes a difference whether you are looking at a film, editing an image, surfing the Internet or writing texts. You can configure the respective default settings for brightness, gamma correction and colour temperature at the press of a button. For example, paper mode simulates the pleasant contrast of books by reducing the blue light portion and brightness. This reduces wear on your eyes when reading documents and prevents tiredness.

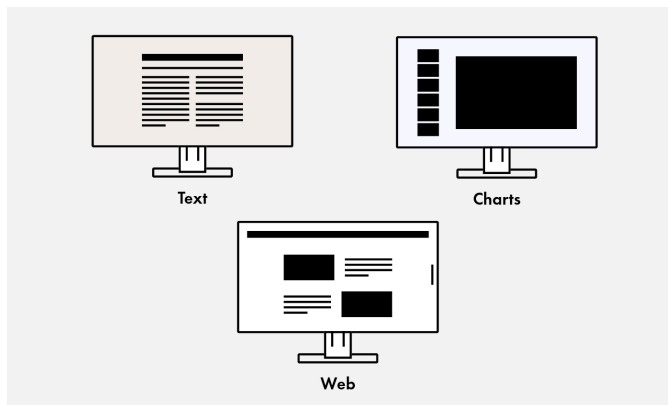

Screen InStyle

In addition to the on-screen menu, you can conveniently control the EV2456 by using the Screen InStyle software on a Windows PC. The configuration options include colour reproduction, energy saving options, and ergonomic functions that allow you to reduce the blue light portion (Circadian Dimming). The Screen InStyle software allows the user to apply the settings to all connected screens when using a multi-screen system.

[More about Screen InStyle](#)


Screen InStyle Server is a server application that allows system administrators to centrally manage and control monitors on which Screen InStyle is installed and which are connected to the network. This optimises power consumption and simplifies monitor asset management.

[More about Screen InStyle Server](#)

Monitor Configurator for cross-network settings


Reduced workload for network administrators: The software allows you to configure multiple monitors uniformly in a single step – via a USB connection. This saves you time and ensures

you have the same settings on all screens. The configuration can be saved as an XML file and transferred to clients.

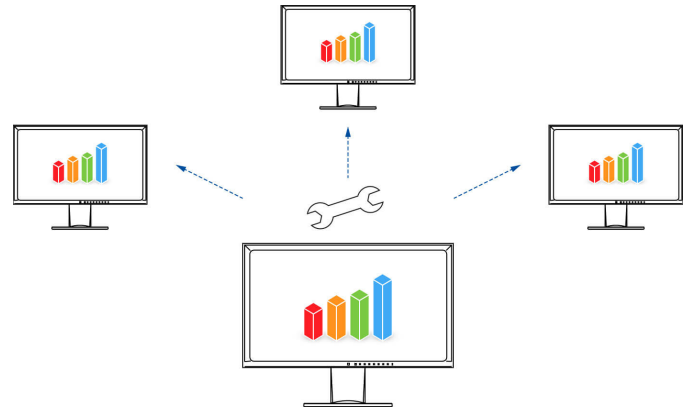

Operation made easy thanks to the Button Guide

The Button Guide provides all functions at a glance. Touching the button is enough and the screen will show all functions and the corresponding control panel.

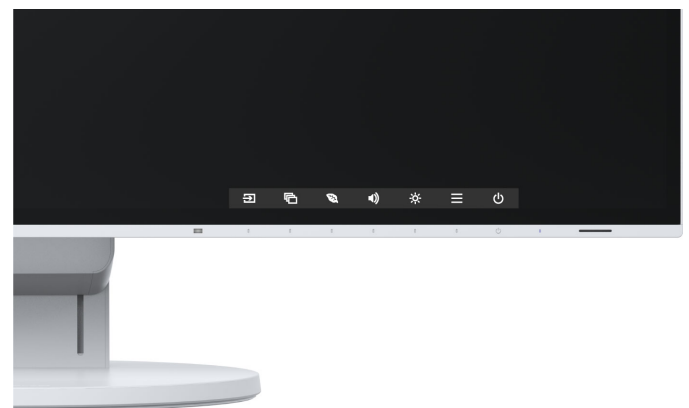

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.

Save up to 30% of energy with the EcoView Optimizer

Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.

Features

LED backlight: Economical in consumption, free from mercury

The monitors with an LED backlight help save the environment throughout their entire service life – from manufacturing through operation to disposal. For on the one hand they are characterized by particularly low electricity consumption. The typical consumption is just 11 Watt. On the other hand, they are free from mercury – a substance that is harmful to both humans and the environment and is very difficult to dispose of.



Zero-Watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.

One monitor, many ports

It doesn't get easier than this: You can connect most of your devices, such as PC, laptop or cameras directly to the monitor because the monitor has a number of different ports. That makes your daily work easier.


Perfectly organized

The monitor ships with a cable holder, which ensures a clean desk and prevents messy cabling.



Flexible base


Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment and can be lowered almost to the base plate of the stand, enabling you to position the top image line ergonomically right below your eye level.




Height
158.6 mm



Tilt
Tilt down 5°, tilt up 35°



Swivel
344°



Rotation
Rotation 90° (right and left)

Features

Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.



Specification

General

Item no.	EV2456-WT
Case colors	White
Areas of application	Office
Product line	FlexScan
EAN	4995047049739
Variants	EV2456-BK (Colour: Black)

Display

Screen size [in inches]	24.1
Screen size [in cm]	61.1
Format	16:10
Viewable image size (width x height)	518 x 324
Ideal and recommended resolution	1920 x 1200
Pixel pitch [mm]	0.27 x 0.27
Resolution supported	1920 x 1200, 1600 x 1200, 1680 x 1050, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480
Panel technology	IPS
Max. viewing angle horizontal	178 °
Max. viewing angle vertical	178 °
Number of colours or greyscale	16.7 million colours (display port, 8 Bit), 16.7 million colours (HDMI, 8 Bit), 16.7 million colours (DVI, 8 Bit), 16.7 million colours (Dsub, 8 Bit)
Colour palette/look-up table	1.06 billion colour tones / 10 Bit
Max. colour space (typical)	sRGB
Max. brightness (typical) [in cd/m²]	350
Max. dark room contrast (typical)	1000:1
Typical response time [grey/grey alternation]	5 ms
Max. refresh rate [in hertz]	60
Backlight	LED

Features & control

Preset colour/greyscale modes	sRGB, Paper, Movie, DICOM, 2x free modes for user selection
DICOM tone curve	✓
RadiCS application classes	VIII
Auto EcoView	✓
EcoView Index	✓
EcoView Optimizer	✓
Overdrive	✓
No flickering thanks to hybrid controls	✓
Signal range amplifier (HDMI)	✓
HDCP Decoder	✓
Input signal identification	✓
Built-in speakers	✓
OSD language	de, en, fr, es, it, se, ja, zh
Adjustment options	Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Colour Mode, Colour tone, Signal input, Overdrive, Resolution, Audio source, Smoothing, OSD language, Interpolation, Volume
Button Guide	✓
Integrated power unit	✓

Ports

Signal inputs	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), Dsub
USB specification	USB 3.1 Gen 1
USB upstream ports	1 x type B
USB downstream ports	2 x type A
Video signal	DisplayPort, DVI (TMDS), HDMI (YUV, RGB), RGB Analog
Sync formats	Separate
Audio input	3.5 mm stereo jack, DisplayPort, HDMI
Audio output	3.5 mm stereo jack

Electric data

Frequency	Dsub: 31-81 kHz/55-76 Hz; Display Port: 31-76 kHz/59-61 Hz; DVI-D: 31-76 kHz/59-61 Hz; HDMI: 31-76 kHz/49-61 Hz
Power consumption (typical) [in watt]	11
Maximum Power Consumption [in watt]	44 (bei maximaler Helligkeit und Betrieb aller Signal- und USB-Anschlüsse)
Power Save Mode [in watt]	0.5
Power consumption off [in watt]	0
Energy-efficiency class	A++
Annual energy consumption [in kWh]	19
Power supply	AC 100-120 V / 200-240 V, 50/60 Hz

Dimensions & weights

Dimensions [mm]	531 x 351,4 - 510,1 x 190
Weight [in kilograms]	5.7
Dimensions without stand [mm]	531 x 341,9 x 45,5
Weight without stand [in kilograms]	3.7
Swivel	344 °
Incline forward/backward	5 ° / 35 °
Pivot	✓ 90° (right and left)
Height adjustment range [mm]	158.6
Hole spacing	VESA standard 100 x 100 mm

Certification & standards

Certification	CE, CB, TCO certified 8.0, EPA Energy Star, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE
---------------	--

Software & accessories

Accompanying software and other accessories are available for download	ScreenManager PRO, ScreenSlicer, Screen InStyle
Additional supply	Power cord, Signal cable DisplayPort - DisplayPort, USB 3.0 cable, Quick guide, Manual on CD, Cable protection
Accessories	EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PCSK-03-WT (Thin client mount for the stand EIZO FlexStand 4/ FlexStand 5)

Warranty

Warranty and service	5 years warranty*
----------------------	-------------------

Terms

*) Maximum of 30,000 hours of operation from the date of purchase. **) Zero pixel error guarantee for completely lit sub-pixels (partial pixels ISO 9241-307). Valid: six months from the purchase date.