

70mm

70mm

70mm

70mm

70mm

Smartline®

Safety Timer 15-755 min



ART. 16104

OPERATING ANVÄNDNING

ENG: Connect the safety timer to a 230V wall outlet.
To start the timer function, press the button once.
1 press starts a 15 minutes countdown, pressing once more adds another 15 minutes up to 75 minutes.

The safety timer has 5 LED indicators all around which turn on and off respectively.
Each LED indicator means 15 minutes.

SV: Anslut säkerhetstimern till ett vägguttag 230V.
För att starta timerfunktionen trycker man 1 gång på knappen.
1 tryck startar 15 minuter nedräkning, trycker man en gång till adderas ytterligare 15 minuter upp till 75 minuter.


Säkerhetstimern har 5st LED indikator runt om som tänds respektive släcks.
Varje LED indikator betyder 15 minuter.

OPERATING ANVÄNDNING

ENG: Sets the time with the push of a button.
Each button press indicates 15 minutes up to 75 minutes.
During countdown period, LED will be OFF one by one according to the countdown time.

SV: Ställer in tiden med ett knapptryck.
Varje knapptryck indikerar 15 minuter upp till 75 minuter.
Under nedräkningsperioden kommer lysdioden att släckas en efter en enligt nedräkningstiden.

On/Off - AV/PÅ
Button - Knapp

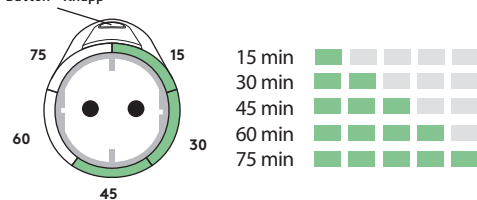

SAFETY INFORMATION SÄKERHETSINFORMATION

ENG: The product is intended for indoor use and dry environments only. Used in working temperatures between 0 °C and 35 °C.
Used in a grounded wall socket 230V. Do not connect several timers one after the other. Max load 2300W resistive. The product must be under supervision and must not be placed, for example, behind curtains, a sofa or the like. The product must always be easy to reach and handle. Do not open or modify the units in any way, this should only be done by an authorized technician due to the risk of electric shock or short circuit.
The product is not intended for equipment that requires constant supervision, e.g. iron or electric fryer due to fire risk.

SV: Produkten är avsedd för inomhusbruk och torra miljöer endast. Brukas i arbetstemperaturer mellan 0 °C till 35 °C. Används i ett jordat vägguttag 230V. Koppla inte ihop flera timers efter varandra. Max belastning 2300W resistiv. Produkten skall vara under uppsikt och får ej placeras exempelvis bakom gardiner, soffor eller liknade. Produkten skall alltid vara lätt att nå och hanteras.
Öppna inte eller modifiera enheterna på något vis, detta bör endast utföras av en godkänd tekniker pga risken för elektriska stötar eller kortslutning. Produkten är ej ämnade för utrustning som kräver konstant uppsyn, t.ex. strykjärn eller elektrisk fritös pga brandrisk.

SPECIFICATION SPECIFIKATION

Item Nr: 16104
Timer: 15 - 75 minutes
Voltage: 230VAC, 50Hz
Max. Load: 10(1) A, 2300W.μ (resistive)

Artikel Nr: 16104
Timer: 15 - 75 minuter
Strömförsörjning: 230VAC, 50Hz
Maxbelastning: 10(1) A, 2300W.μ (resistiv)



Smartline® is a Swedish brand owned and marketed by Proove Distribution AB.
www.smartlinesweden.com • info@smartlinesweden.com
BirgerSvenssons Väg 34B, 432 40 Varberg, Sweden • +46 (0)346-715600

100mm