



Pro-1000-5G antenna, <8 dBi For 4G/5G

Pro-1000-5G is a further development of the popular antenna Pro-1000, for both indoor and outdoor use for the frequency bands 698-800/800-960/1710-2500/2500-2700/3400-3800. With the double brackets included, it can be easily mounted on both antenna tubes or on the wall. The Pro-1000-5G is supplied with 2 meters of low-loss cable and mounted SMA connector. Despite the compact design, the amplification is up to 8 dBi.

Ref.	650505
EAN13	8424450271810

Other features

Colour	White
---------------	-------

Packaging info

Box	1 Units
------------	---------

Physical data

Net weight	450.00 g
Gross weight	801.00 g
Width	210.00 mm
Height	180.00 mm
Depth	45.00 mm
Main product weight	450.00 g

Highlights


- For outdoor and indoor use
- 2 meter low loss cable

- SMA connector
- Mounted on wall or on pipe 30-53 mm

Technical specifications : Ref. 650505

Telephony bands		2G	3G	4G	5G
Frequency range	MHz	698 ... 960	1710 ... 2500	2500 ... 2700	3400 ... 3800
Gain	dBi	7	8	6	4
Input impedance	Ω	50			
Polarisation		Vertical			
Horizontal beamwidth	°	90	75	75	40
Vertical beamwidth	°	65	55	50	35
F/B ratio	dB	> 10			
Max. power	W	100			
Number of connectors		1			
Connector type		SMA Male			
Cable length	m	2			
Mast diameter	mm	30 ... 53			
Operating temperature	°C	-40 ... 60			

Antennnmontage

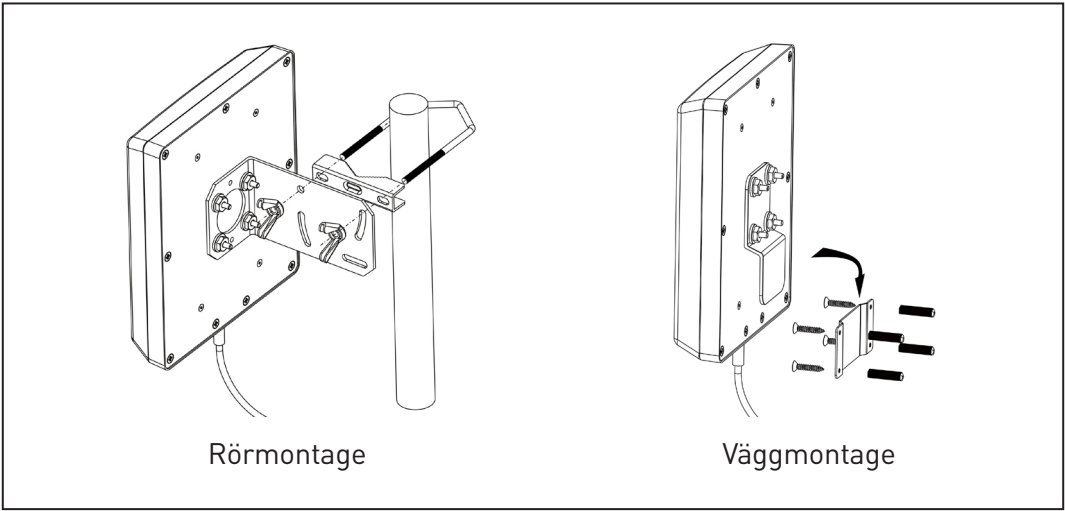

Fäste ingår